

Ducted Range

Whole Home Systems



Why Choose Fujitsu?

Australia's Favourite Air®

Fujitsu General is a leading supplier of air conditioners in Australia, with a portfolio to suit both residential and commercial applications. We focus all of our research and manufacturing strengths into air conditioners which has resulted in our extensive range of world-class, energy efficient, market-leading air conditioners.

Fujitsu General strives to consistently provide high quality, reliable products accompanied by superior customer service. To be 'Australia's Favourite Air®' means to be the best air conditioning company to deal with in Australia, not just a leading air conditioning brand.

That's why we're proud to say we are 'Australia's Favourite Air®'.

Fujitsu Channel Partner Network

Fujitsu have a comprehensive network of dealers right across Australia. This ensures that there is a local stockist in your area to assist you in purchasing a Fujitsu air conditioning system for your home.

An Award Winning Brand

Fujitsu understands that our customers are investing in our brand and trusting that we will provide their family with a comfortable living environment all year round.

Fujitsu is honoured to be voted Reader's Digest Most Trusted Brand in the Air Conditioning category from 2018-2022 and awarded highly commended from 2023-2025.

Fujitsu General has also won the ProductReview.com.au Best Appliance Brands award for 2023-2025 and was recognised in the Finder Awards 2025 as both a Top Value and Most Loved Brand.



Peace of Mind

Fujitsu believe in the quality and reliability of every air conditioner we sell. This is why we're happy to provide a 5 year parts and labour warranty across the entire range.





Exceptional after sales service



Trusted brand



5 year manufacturer's warranty

Sporting Chance

Fujitsu General Australia is extremely proud to be a major sponsor of the Sporting Chance Cancer Foundation. Established in 1996, Sporting Chance is a not-for-profit organisation that helps provide home support and care to children with cancer.



To date, Fujitsu General has donated more than \$11M to this worthy cause, with a percentage of sales from Fujitsu's air conditioning units going towards the funding of outreach programs and exploring better ways to treat and overcome cancer. Sporting Chance initiatives allow families to spend more quality time at home together, while still having access to the appropriate care for their child.

State of the Art Research and Development

Our state of the art research and development centre, located at our headquarters in Japan, is equipped with numerous testing facilities simulating a variety of air conditioning operating conditions. Our rigorous testing aims to meet Fujitsu's high standard of product quality and reliability.

Exceptional After Sales Service

At Fujitsu, we pride ourselves on providing exceptional customer service. Fujitsu General Assist is our in-house customer care and technical support department which was implemented to deliver a high level of support and accessibility to our customers.

Fujitsu General Assist deploys Fujitsu-trained technicians in Sydney, Melbourne, Brisbane, Adelaide, and Perth and provides access to dedicated Service Agents in all other parts of Australia. These technicians are well equipped with the necessary tools and spare parts to enable them to resolve issues onsite, promptly. This offers customers a high first time fix rate and seamless experience.





Ducted Range



Whole home solutions

from small to large homes including apartments and townhouses

What Is Ducted Air Conditioning and How Does It Work?

Ducted air conditioning is usually a whole home solution that allows you to condition multiple rooms or the entire house using just one system. The indoor unit is located in the ceiling, whilst the outdoor unit is placed in a suitable location outside the home.

Conditioned air is circulated via a network of ducts in your ceiling cavity, with outlets in as many or as few rooms as you wish.

The temperature and hours of operation are controlled by a simple and easy to use wall controller.

All Fujitsu ducted air conditioners are reverse cycle, meaning you can come home to comfort, all year round.

What Is Zone Control?

Ducted air conditioning allows for the home to be divided into separate areas, or 'zones'. Zoning will allow you to have greater control over the airflow around the home and provides flexibility to use your system to suit your living arrangements and lifestyle.

Depending on the system, you can select which zones are on or off, or with advanced controllers select different temperatures for specific zones at the same time. This can improve energy efficiency and deliver superior comfort.



Energy Efficiency

By using the weekly timer function, dampers can be opened and closed to match your daily schedule. It's a 'set and forget' way to keep the temperature of your home comfortable all year round.

anywAiR® Technology Ducted Controller

Control your air from anywhere.



0-100% **Variable Air Volume (VAV)²**
Select the percentage of air flow for each zone



Create up to 12 scenarios
Program scenes through custom settings



Temperature Controlled VAV³
Control temperature and air flow in up to 10 zones



Timers
Turn the unit on/off after a set time



AC Control
On/Off, fan speed, set point and mode

Wi-Fi Control For Fujitsu Ducted Air Conditioners¹

The Fujitsu General anywAiR® technology ducted controller provides Wi-Fi control for Fujitsu ducted air conditioning systems via a wall mounted touch pad. Remote access is available using the anywAiR® App¹, giving control of your ducted system anytime, anywhere with selected smartphone and tablet devices.

Easy To Use Touch Pad

Mounted portrait or landscape to the wall by a Fujitsu Installer, the anywAiR® technology ducted controller is simple to set-up using a Google Play Store account. The touch pad is the central point from which to operate the system and can be used to manage a variety of Android apps such as weather, recipes, music and other home automation apps.

Wi-Fi Control Of Up To 10 Zones

The new technology enables you to run your ducted system efficiently and easily, by controlling the airflow and temperature of up to 10 different zones within your home.





Variable Air Volume (VAV)²

Variable Air Volume (VAV) control allows you to select the percentage of air flow for each zone from 0 to 100 percent, in 5 percent increments. This gives you greater control of air flow to each zone to better meet your comfort needs.

Temperature Controlled VAV³


Temperature Controlled VAV is available to zones which have the optional temperature sensors installed. This feature allows you to choose the desired temperature for a zone and the system will automatically adjust the air flow to assist in maintaining each zone's desired temperature.

Programmable Scenarios


Create up to 12 custom scenes to run a series of commands at the touch of a button or at a chosen time. Commands can include turning the unit on and off, changing the mode or temperature, and selecting which zones are open. Scenarios such as going to work, coming home or bedtime can be easily programmed to control the air flow and temperature to rooms required at set times.

Mounting

Your anywAiR[®] touch pad is permanently attached to your wall with the ability to pivot between portrait and landscape modes so that you can enjoy all your apps in the orientation that suits you best. To be installed by a Fujitsu air conditioning specialist.

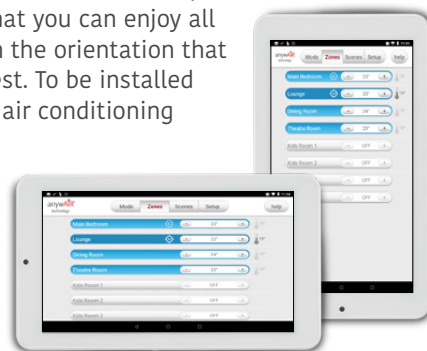

¹The anywAiR[®] App is only compatible with a selected range of Fujitsu General ducted systems when the optional anywAiR[®] technology Wi-Fi ducted controller is installed. It is not a standard inclusion when purchasing a Fujitsu ducted system and must be installed by a Fujitsu Installer. ² VAV control is achieved by adjusting the opposed blade damper to control the airflow. The airflow fan setting (high/med/low/auto) of the system works independently to this function. Copyright© 2021 Fujitsu General Australia. All rights reserved. Actual products' colours may be different from the colours shown in this printed material. App Store is a service mark of Apple Inc. ©2021 Google LLC All rights reserved. Google Play and the Google Play logo are trademarks of Google LLC. Other trademarks and tradenames are acknowledged to be the copyright of their respective holders. ³ Requires optional individual room sensors to be installed.

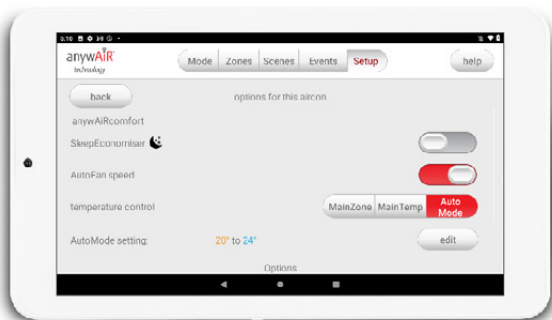

SleepEconomiser

The SleepEconomiser feature will automatically adjust your air conditioner from COOL to FAN mode overnight from 10pm to 6am. It will then adjust itself back. This mode will help save energy during hot summer nights and help reduce noise for sleeping neighbours.

MainZone

The MainZone feature makes that particular zone the “information centre” for the air conditioning unit. That means the set-point for that zone becomes the setpoint the air conditioning unit will work toward. The actual measured temperature of that zone is the temperature sent to the unit for it to make its decisions about whether to start/stop or speed up/down to effectively achieve the set-point while maintaining constant airflow in the MainZone.

AutoFan

Allows the zone controller to automatically adjust the unit fan speed based on the current number of open zones.

MainTemp

Acts as an automated MainZone. MainTemp will automatically select the zone with the greatest difference between actual and desired temperatures.

Once this zone is selected and the desired temperature is reached, a new room will be selected and the process repeated. For example, if your living room is currently 30°C and your desired temperature is 21°C then the MainTemp will focus on this room until the desired temperature is reached before focusing on another room or zone.

AutoMode


Taking MainTemp to the next level, AutoMode gives you full temperature automation. This feature not only selects a zone as MainZone, it will also change the mode of air conditioning between cooling and heating in order to reach and maintain the desired temperature.

Active Weather

Receive real-time temperature updates for your suburb when entering your postcode. Create and manage events to automate your cooling or heating, based on local temperatures, with the option to receive alerts for enhanced convenience and control.

Download the free app to control your air from anywhere⁴

1. Download the anywAir® App from the App store or Google Play
2. Follow the App configuration steps
3. Once set up, the anywAir® App interacts with the anywAir® technology ducted controller to remotely control your ducted system.

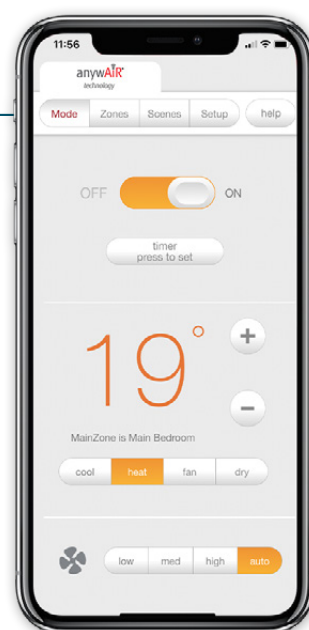

⁴The anywAir® app is only compatible with a selected range of Fujitsu General ducted air conditioners when the optional anywAir® technology ducted controller is installed. It is not a standard inclusion when purchasing a Fujitsu ducted air conditioning system and must be installed by a Fujitsu Authorised Installer. Copyright(C) 2021 Fujitsu General Australia. All rights reserved. Actual products' colours may be different from the colours shown in this printed material. App Store is a service mark of Apple Inc. (C) 2021 Google LLC All rights reserved. Google Play and the Google Play logo are trademarks of Google LLC. Other trademarks and tradenames are acknowledged to be the copyright of their respective holders.

Garage Door Controller Add-On Module



Further enhance your smart home experience with the all-new add-on Garage Door Controller and Sensor⁵

Whether you're at work or on the go, you'll have peace of mind knowing you can check and control your garage door right from your smartphone.

Now that's smart...



Remote Control

Operate your garage door from anywhere through the anywAiR technology app on your smart device.

Compatibility

Designed for panel doors with a flat surface, ensuring accurate status detection (open, moving, or shut).

Automatic Notifications

Automatic Notifications: Receive alerts on your connected devices if the garage door is left open for a specified duration.

⁵ Fujitsu's Garage Door Controller and Garage Door Sensor is an add-on that is compatible with the new UTY-ANY2 Ducted Controller and must be installed by a Fujitsu installer. Applicable for panel garage doors only. App version 2.1478 or later.

Bulkhead

- ✓ A single-room solution
- ✓ Suitable for townhouses and apartments
- ✓ Quiet and efficient
- ✓ Intuitive control
- ✓ R32 refrigerant
- ✓ Compact design to allow for flexible installation in the best available space

Indoor units



ARTH09KSLAP

2.5kW | 3.2kW
cooling | heating


ARTH12KSLAP

3.5kW | 4.0kW
cooling | heating



ARTH18KSLAP

5.0kW | 6.0kW
cooling | heating

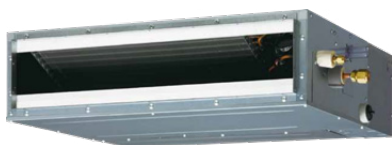


ARTH09KLLAP

2.5kW | 3.2kW
cooling | heating

ARTH12KLLAP

3.5kW | 4.0kW
cooling | heating

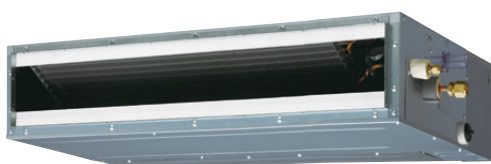


ARTH18KLLAP

5.0kW | 6.0kW
cooling | heating



Outdoor units

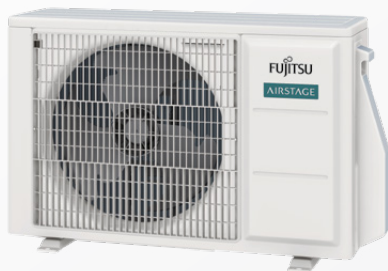

AOTH09/12KBTA



AOTH18KBTA

Standard controller



LCD
Touch Panel
Controller
UTY-RNRT

Available optional controllers



anywAir®
Technology Wi-Fi
Adaptor II
SET-UTY-NXT



Kagami
Controller
UTY-RVRY



LCD
Touch Panel
Controller
UTY-RNRYTS



LCD Simple
Controller
with Operation
mode
UTY-RSRYT




LCD Simple
Controller
without Operation
mode
UTY-RHRYT

Mid Static Slimline

- ✓ Suitable for apartments and smaller homes typically up to 4 rooms
- ✓ Improved maximum guaranteed operating temperature range of up to 50 degrees in cooling mode
- ✓ Compatible with the optional Wi-Fi anywAiR® technology ducted controller
- ✓ R32 refrigerant
- ✓ High performance model available – larger outdoor unit and more energy efficient
- ✓ Compact design to allow for flexible installation in the ceiling
- ✓ Zone system compatible

Indoor units

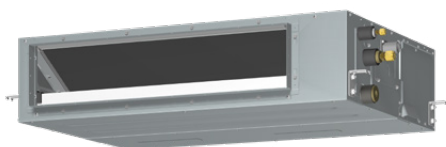

Standard

ARTH18KMTAP

5.0kW cooling | 6.0kW heating


ARTH24KMTAP

7.1kW cooling | 8.0kW heating

High performance

ARTH24KMTAP-HP

7.1kW cooling | 8.0kW heating

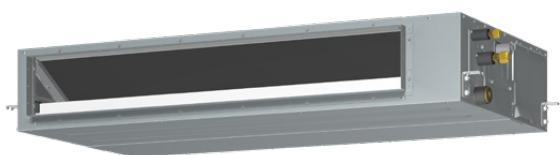

ARTH30KMTAP

8.5kW cooling | 10.0kW heating

ARTH30KMTAP-HP

8.5kW cooling | 10.0kW heating

ARTH36KMTAP

10.0kW cooling | 11.2kW heating

ARTH45KMTAP

12.5kW cooling | 14.0kW heating

ARTH54KMTAP

13.0kW cooling | 15.0kW heating



Outdoor units



AOTH18KBTA



AOTH24KBTA



AOTH30/36KBTA



AOTH45/54KBTA

Standard

High performance


AOTH24/30KCTA

Standard controller



LCD
Touch Panel
Controller
UTY-RNRT

Available optional controllers



anywAiR[®]
technology ducted
controller
UTY-ANY2



anywAiR[®]
Technology Wi-Fi
Adaptor II
SET-UTY-NXT



Kagami
Controller
UTY-RVRY



LCD
Touch Panel
Controller
UTY-RNRYT5



LCD Simple
Controller with
Operation
mode
UTY-RSRYT



LCD Simple
Controller without
Operation
mode
UTY-RHRYT

High Static Single Phase & Three Phase R32

- ✓ Suitable for apartments and smaller homes typically up to 4 rooms
- ✓ Improved maximum guaranteed operating temperature range of up to 50 degrees in cooling mode
- ✓ Compatible with the optional Wi-Fi anywAiR® technology ducted controller
- ✓ 5 High Static Single Phase High Performance models available from 8.5kW to 16kW for improved energy efficiency
- ✓ Demand response enabled and zone system compatible
- ✓ R32 refrigerant
- ✓ Compact design to allow for flexible installation in the ceiling
- ✓ Only 500mm of clearance space required in front of the outdoor unit. Suitable for narrow spaces

Indoor units



Standard

ARTH24KHTA

7.1kW cooling | 8.0kW heating

ARTH30KHTA

8.5kW cooling | 10.0kW heating

ARTH36KHTA

10.0kW cooling | 10.0kW heating

High performance

ARTH30KHTA-HP

8.5kW cooling | 10.0kW heating

ARTH36KHTA-HP

10.0kW cooling | 12.5kW heating

3 phase

ARTH36KHTA-3PH

10.0kW cooling | 11.2kW heating



ARTH45KHTA

12.5kW cooling | 14.0kW heating

ARTH54KHTA

14.0kW cooling | 15.5kW heating

ARTH60KHTA

15.5kW cooling | 18.0kW heating

ARTH45KHTA-HP

12.5kW cooling | 15.0kW heating

ARTH54KHTA-HP

14.0kW cooling | 16.5kW heating

ARTH45KHTA-3PH

12.5kW cooling | 14.0kW heating

ARTH54KHTA-3PH

14.0kW cooling | 15.5kW heating

ARTH60KHTA-3PH

15.5kW cooling | 18.0kW heating



ARTH60KHTB

16.0kW cooling | 18.0kW heating



Outdoor units




Standard	AOTH24KBTA	AOTH30/36KBTA	AOTH45/54KBTA	AOTH60KBTA
High performance			AOTH30/36KCTA	AOTH45/54/60KCTA
3 phase		AOTH36KRTA	AOTH45/54KRTA	AOTH60KRTA

Standard controller



LCD
Touch Panel
Controller
UTY-RNRT

Available optional controllers



anywAiR[®]
technology ducted
controller
UTY-ANY2



anywAiR[®]
Technology Wi-Fi
Adaptor II
SET-UTY-NXT



Kagami
Controller
UTY-RVRY



LCD
Touch Panel
Controller
UTY-RNRYT5



LCD Simple
Controller
with Operation
mode
UTY-RSRYT



LCD Simple
Controller
without
Operation
mode
UTY-RHRYT

Large Capacity High Static Single Phase & Three Phase R32

- ✓ Suitable for larger homes, typically up to 6 rooms
- ✓ Compatible with the optional Wi-Fi anywAIR® technology ducted controller
- ✓ Indoor unit can be separated to enable easy in-roof installation
- ✓ R32 refrigerant
- ✓ Allows for an increased number of air ducts to be installed
- ✓ Compact design to allow for flexible installation in the ceiling
- ✓ Only 500mm of clearance space required in front of the outdoor unit. Suitable for narrow spaces
- ✓ Improved maximum guaranteed operating temperature range of up to 50 degrees in cooling mode
- ✓ Approved for Victorian Energy Upgrades Program (excluding SET-ARTH90KHTA-3PH)

Indoor units

Standard

3 phase



ARTH65KHTA

18.0kW cooling | 20.0kW heating

ARTH65KHTA-3PH

18.0kW cooling | 20.0kW heating



ARTH72KHTA-3PH

20.0kW cooling | 22.4kW heating



ARTH90KHTA-3PH

22.4kW cooling | 25.0kW heating



Outdoor units



Standard

AOTH65KBTA

3 Phase


AOTH65/72/90KRTA

Standard controller



LCD
Touch Panel
Controller
UTY-RNRT

Available optional controllers

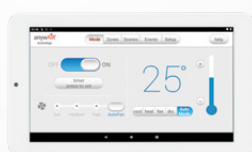

anywAiR[®]
technology ducted
controller
UTY-ANY2



anywAiR[®]
Technology Wi-Fi
Adaptor II
SET-UTY-NXT



Kagami
Controller
UTY-RVRY



LCD
Touch Panel
Controller
UTY-RNRYT5



LCD Simple
Controller
with Operation
mode
UTY-RSRYT



LCD Simple
Controller
without
Operation
mode
UTY-RHRYT

Feature Checklist

		ARTH09KSLAP	ARTH09KLLAP	ARTH12KSLAP	ARTH12KLLAP	ARTH18KSLAP	ARTH18KLLAP	ARTH18KMTAP	ARTH24KMTAP	ARTH30KMTAP	ARTH36KMTAP	ARTH45KMTAP	ARTH54KMTAP
		Bulkhead						Mid Static Slimline					
Auto Changeover	Automatically switches between operating modes based on the temperature setting and room temperature	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Auto Restart	The unit will automatically restart in the same operating mode after a temporary loss of power	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Automatic Airflow Adjustment	The micro-processor automatically adjusts air flow to follow changes in room temperature	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Automatic Static Pressure Setting Adjustment	The unit will automatically set the optimal static pressure setting							✓	✓	✓	✓	✓	✓
Blue Fin Heat Exchanger	Corrosion-resistance has been improved by blue fin treatment of the outdoor unit heat exchanger	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Connectable Distributing Duct	Systems are capable of attaching field-supplied branch ducts distributing the airflow	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Connectable Fresh Air Duct	Systems are capable of attaching field-supplied branch ducts to bring fresh air in							✓	✓	✓	✓	✓	✓
Demand Response	Compatible with the Air Conditioning Demand Response program. When your electricity supplier activates one of the three modes, the air conditioner switches over to the appropriate operation	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Economy Mode	The temperature will adjust by 1°C to allow for a reduction in power drawn from the compressor to help save energy	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Error Code Display	Shown on the wired remote controller display or the indicator lamps on the indoor receiver unit	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Filter Sign	Set the interval frequency to be reminded to clean the air filter on your unit	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
In-Built Drain Pump	The drain pump is in-built into the system	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Long Piping Capability 75m	Equipped with a maximum pipe length of 75m												
On-Off Timer	Can be set to operate once every 24 hours	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Operating Temperature Range 50°C	The maximum guaranteed operating temperature range is 50 degrees in cooling mode							✓	✓	✓	✓	✓	✓
Program Timer¹	Allows selection of one of four options. ON, OFF, ON-->OFF, or OFF-->ON							✓	✓	✓	✓	✓	✓
Weekly + Setback Timer	Can set temperature for two time spans and for each day of the week	✓	✓	✓	✓	✓	✓						
Weekly Timer	Different on-off timers can be set for up to 7 days	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Zone Control	Air condition selected zones within the indoor space							✓	✓	✓	✓	✓	✓

¹ Available only when connected with optional wireless remote controller.

ARTH24KMTAP-HP	ARTH30KMTAP-HP	ARTH24KHTA	ARTH30KHTA	ARTH36KHTA	ARTH45KHTA	ARTH54KHTA	ARTH60KHTA	ARTH30KHTA-HP	ARTH36KHTA-HP	ARTH45KHTA-HP	ARTH54KHTA-HP	ARTH60KHTB	ARTH36KHTA-3PH	ARTH45KHTA-3PH	ARTH54KHTA-3PH	ARTH60KHTA-3PH	ARTH65KHTA	ARTH65KHTA-3PH	ARTH72KHTA-3PH	ARTH90KHTA-3PH
Mid Static Slimline (HP)	High Static Single Phase							High Static Single Phase (HP)				High Static Three Phase				Large Capacity High Static Single Phase & Three Phase				
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
												✓					✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓																			
✓	✓							✓	✓	✓	✓	✓					✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Product Specifications

Bulkhead R32

Set Code			SET-ARTH09KSLAP	SET-ARTH12KSLAP	SET-ARTH18KSLAP
Model No.	Indoor unit		ARTH09KSLAP	ARTH12KSLAP	ARTH18KSLAP
	Outdoor unit		AOTH09KBTA	AOTH12KBTA	AOTH18KBTA
Power Source	V / Ph / Hz		230 / 1 / 50		
Capacity	Cooling (Rated (Min - Max))	kW	2.50 (0.9 - 3.6)	3.50 (0.9 - 4.1)	5.00 (0.9 - 5.9)
	Heating (Rated (Min - Max))	kW	3.20 (0.9 - 4.5)	4.00 (0.9 - 5.1)	6.00 (0.9 - 7.1)
Input Power	Cooling (Rated (Max))	kW	0.64 (1.15)	0.98 (1.41)	1.48 (1.95)
	Heating (Rated (Max))	kW	0.80 (1.5)	1.1 (1.97)	1.73 (2.58)
EER	Cooling	kW / kW	3.91	3.57	3.38
COP	Heating	kW / kW	4.00	3.64	3.47
Star Rating	Cooling: Hot/Average/Cold		3 / 2.5 / 3	3 / 2.5 / 2.5	3 / 2.5 / 2.5
	Heating: Hot/Average/Cold		2.5 / 2.5 / 2	2.5 / 2 / 1.5	2.5 / 2 / 1.5
TCSPF ¹	Residential (Hot/Average/Cold)	kW	4.999 / 4.49 / 4.551	4.645 / 4.269 / 4.374	4.584 / 4.264 / 4.418
HSPF ²	Residential (Hot/Average/Cold)	kW	4.339 / 4.053 / 3.736	4.371 / 3.934 / 3.492	4.43 / 3.86 / 3.319
Running current	Cooling/Heating		amps	4.6 / 5.1	6.3 / 7.3
Moisture Removal		l/hr	0.5	1.5	2
Sound Pressure Level ³	Indoor (Cooling)	High/Quiet	dBA	29 / 23	33 / 23
	Indoor (Heating)	High/Quiet		29 / 23	33 / 23
	Outdoor (Cooling/Heating)	High		41 / 46	48 / 49
Sound Power Level	Outdoor	High		59	62
Static Pressure Range	Min - Max		PA	-	-
Air Circulation	Indoor (Cooling)	High Fan	l/sec	167	261
	Indoor (Heating)	High Fan		167	261
Dimensions H x W x D	Indoor		mm	198 x 700 x 450	198 x 900 x 450
	Outdoor			542 x 799 x 290	632 x 799 x 290
Net Weight	Indoor		kg	15.50	18.50
	Outdoor			32.00	36.00
Connection Pipe Diameter (Liquid/Gas)		mm	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø12.70
Pipe Length (Max (Precharged))		m	20 (15)	20 (15)	30 (20)
Max Height Difference		m	15	15	20
Operation Range	Outdoor (Min - Max)	Cooling	°CDB	-10 to 46	-10 to 46
		Heating		-15 to 24	-15 to 24
Refrigerant	Type		R32	R32	R32
	Charge	g	850	850	1,020

¹ Total Cooling Seasonal Performance Factor

² Heating Seasonal Performance Factor

³ Measured values in manufacturer's anechoic chamber. Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

Bulkhead R32

Set Code			SET-ARTH09KLLAP	SET-ARTH12KLLAP	SET-ARTH18KLLAP
Model No.	Indoor unit		ARTH09KLLAP	ARTH12KLLAP	ARTH18KLLAP
	Outdoor unit		AOTH09KBTA	AOTH12KBTA	AOTH18KBTA
Power Source	V / Ph / Hz		230 / 1 / 50		
Capacity	Cooling (Rated (Min - Max))	kW	2.50 (0.9 - 3.6)	3.50 (0.9 - 4.1)	5.00 (0.9 - 5.9)
	Heating (Rated (Min - Max))	kW	3.20 (0.9 - 4.8)	4.00 (0.9 - 5.5)	6.00 (0.9 - 7.5)
Input Power	Cooling (Rated (Max))	kW	0.61 (1.11)	0.93 (1.33)	1.38 (2.00)
	Heating (Rated (Max))	kW	0.77 (1.48)	1.05 (1.87)	1.60 (2.39)
EER	Cooling	kW / kW	4.10	3.76	3.62
COP	Heating	kW / kW	4.16	3.81	3.75
Star Rating	Cooling: Hot/Average/Cold		3.5 / 3 / 3	3 / 2.5 / 2.5	3 / 3 / 3
	Heating: Hot/Average/Cold		3 / 2.5 / 2	3 / 2.5 / 2	3 / 2.5 / 2
TCSPF ¹	Residential (Hot/Average/Cold)	kW	5.08 / 4.535 / 4.567	4.808 / 4.397 / 4.485	4.868 / 4.508 / 4.656
HSPF ²	Residential (Hot/Average/Cold)	kW	4.606 / 4.27 / 3.9	4.589 / 4.116 / 3.618	4.661 / 4.105 / 3.536
Running current	Cooling/Heating		amps	4.4 / 5	5.9 / 6.8
Moisture Removal		l/hr	0.7	1.3	2
Sound Pressure Level ³	Indoor (Cooling)	High/Quiet	dBA	28 / 25	32 / 27
	Indoor (Heating)	High/Quiet		28 / 24	32 / 27
	Outdoor (Cooling/Heating)	High		41 / 46	48 / 49
Sound Power Level	Outdoor	High		59	62
Static Pressure Range	Min - Max		PA	-	-
Air Circulation	Indoor (Cooling)	High Fan	l/sec	167	261
	Indoor (Heating)	High Fan		167	261
Dimensions H x W x D	Indoor		mm	198 x 700 x 620	198 x 900 x 620
	Outdoor			542 x 799 x 290	632 x 799 x 290
Net Weight	Indoor		kg	17.00	20.00
	Outdoor			32.00	36.00
Connection Pipe Diameter (Liquid/Gas)		mm	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø12.70
Pipe Length (Max (Precharged))		m	20 (15)	20 (15)	30 (20)
Max Height Difference		m	15	15	20
Operation Range	Outdoor (Min - Max)	Cooling	°CDB	-10 to 46	-10 to 46
		Heating		-15 to 24	-15 to 24
Refrigerant	Type		R32	R32	R32
	Charge	g	850	850	1,020

¹ Total Cooling Seasonal Performance Factor

² Heating Seasonal Performance Factor

³ Measured values in manufacturer's anechoic chamber. Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

Product Specifications

Mid Static Slimline R32

Set Code			SET-ARTH18KMTAP	SET-ARTH24KMTAP	SET-ARTH30KMTAP	SET-ARTH36KMTAP	SET-ARTH45KMTAP	SET-ARTH54KMTAP
Model No.	Indoor unit		ARTH18KMTAP	ARTH24KMTAP	ARTH30KMTAP	ARTH36KMTAP	ARTH45KMTAP	ARTH54KMTAP
	Outdoor unit		AOTH18KBTA	AOTH24KBTA	AOTH30KBTA	AOTH36KBTA	AOTH45KBTA	AOTH54KBTA
Power Source	V / Ph / Hz		230 / 1 / 50					
Capacity	Cooling (Rated (Min - Max))	kW	5.00 (0.9 - 6.4)	7.10 (1.8 - 8.1)	8.50 (2.8 - 10.3)	10.00 (2.8 - 11.4)	12.50 (4.0 - 14.0)	13.00 (4.5 - 15.0)
	Heating (Rated (Min - Max))	kW	6.00 (0.9 - 7.8)	8.00 (2.0 - 9.1)	10.00 (2.7 - 11.3)	11.20 (2.7 - 14.0)	14.00 (4.2 - 16.5)	15.00 (4.7 - 18.0)
Input Power	Cooling (Rated (Max))	kW	1.37 (1.95)	2.15 (2.92)	2.6 (4.28)	3.23 (4.3)	4.0 (5.18)	4.31 (5.19)
	Heating (Rated (Max))	kW	1.58 (2.39)	2.19 (2.67)	2.62 (4.44)	3.3 (4.5)	4.0 (5.22)	4.45 (5.23)
EER	Cooling	kW / kW	3.65	3.30	3.55	3.19	3.13	3.02
COP	Heating	kW / kW	3.80	3.65	4.12	3.73	3.50	3.37
Star Rating	Cooling: Hot/Average/Cold		3 / 2.5 / 2	3 / 2 / 1.5	2.5 / 2.5 / 2.5	2.5 / 2.5 / 2.5	3 / 2 / 1.5	2.5 / 2 / 1.5
	Heating: Hot/Average/Cold		3.5 / 3 / 3	3 / 2.5 / 2.5	3 / 2.5 / 2	3 / 2 / 1.5	2.5 / 2.5 / 3	2.5 / 2.5 / 2.5
TCSPF ¹	Residential (Hot/Average/Cold)	kW	5.012 / 4.663 / 4.844	4.558 / 4.294 / 4.484	4.781 / 4.91 / 5.264	4.338 / 4.141 / 4.359	4.462 / 4.265 / 4.509	4.354 / 4.163 / 4.412
HSPF ²	Residential (Hot/Average/Cold)	kW	4.74 / 4.182 / 3.616	4.694 / 3.996 / 3.375	5.036 / 4.472 / 3.899	4.568 / 3.815 / 3.201	4.512 / 3.881 / 3.295	4.371 / 3.688 / 3.113
Running current	Cooling/Heating	amps	5.9 / 6.8	9.1 / 9.2	11.0 / 11.2	13.6 / 13.9	16.8 / 16.8	18.1 / 18.7
Moisture Removal		l/hr	1.3	1.7	1.6	2.9	4.5	5.0
Sound Pressure Level ³	Indoor (Cooling)	High/Quiet	dBA	33 / 23	38 / 27	38 / 28	38 / 27	40 / 29
	Indoor (Heating)	High/Quiet		33 / 23	38 / 27	38 / 28	38 / 27	40 / 29
	Outdoor (Cooling/Heating)	High		48 / 49	48 / 50	51 / 53	53 / 53	55 / 57
Sound Power Level	Outdoor	High		62	68	69	70	71
Static Pressure Range	Min - Max		PA	50 - 150	50 - 150	50 - 150	50 - 150	50 - 150
Air Circulation	Indoor (Cooling)	High Fan	l/sec	300	416	541	575	600
	Indoor (Heating)	High Fan		300	416	541	575	600
Dimensions H x W x D	Indoor		mm	240 x 1000 x 700	240 x 1000 x 700	240 x 1400 x 700	240 x 1400 x 700	240 x 1400 x 700
	Outdoor			632 x 799 x 290	716 x 820 x 315	788 x 940 x 320	788 x 940 x 320	998 x 940 x 320
Net Weight	Indoor		kg	31.00	31.00	42.00	42.00	42.00
	Outdoor			36.00	36.00	52.00	52.00	67.00
Connection Pipe Diameter (Liquid/Gas)		mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Pipe Length (Max (Precharged))		m	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)
Max Height Difference		m	20	25	30	30	30	30
Operation Range	Outdoor (Min - Max)	Cooling	°CDB	-10 to 50	-10 to 50	-10 to 50	-10 to 50	-10 to 50
		Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type		R32	R32	R32	R32	R32	R32
	Charge	g	1,020	1,250	1,900	1,900	2,700	2,700

¹ Total Cooling Seasonal Performance Factor

² Heating Seasonal Performance Factor

³ Measured values in manufacturer's anechoic chamber. Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

Mid Static Slimline R32 (HP)

Set Code			SET-ARTH24KMTAP-HP	SET-ARTH30KMTAP-HP
Model No.	Indoor unit		ARTH24KMTAP-HP	ARTH30KMTAP-HP
	Outdoor unit		AOTH24KCTA	AOTH30KCTA
Power Source	V / Ph / Hz		230 / 1 / 50	
Capacity	Cooling (Rated (Min - Max))	kW	7.10 (3.3 - 8.5)	8.50 (4.1 - 10.5)
	Heating (Rated (Min - Max))	kW	8.00 (3.6 - 10.5)	10.00 (4.2 - 11.5)
Input Power	Cooling (Rated (Max))	kW	1.85 (2.72)	2.6 (3.38)
	Heating (Rated (Max))	kW	1.93 (2.89)	2.47 (3.12)
EER	Cooling	kW / kW	3.84	3.76
COP	Heating	kW / kW	4.15	4.05
Star Rating	Cooling: Hot/Average/Cold		3 / 2.5 / 2.5	3.5 / 2.5 / 2
	Heating: Hot/Average/Cold		3 / 2.5 / 3	3 / 3 / 3
TCSPF ¹	Residential (Hot/Average/Cold)	kW	4.712 / 4.474 / 4.598	4.8 / 4.569 / 4.727
HSPF ²	Residential (Hot/Average/Cold)	kW	4.962 / 4.491 / 4.043	5.036 / 4.472 / 3.899
Running current	Cooling/Heating		8.0 / 8.4	9.6 / 10.5
Moisture Removal		l/hr	1.7	1.6
Sound Pressure Level ³	Indoor (Cooling)	High/Quiet	dBA	38 / 27
	Indoor (Heating)	High/Quiet		38 / 28
	Outdoor (Cooling/Heating)	High		48 / 50
Sound Power Level	Outdoor	High		67
Static Pressure Range	Min - Max		PA	50 - 150
Air Circulation	Indoor (Cooling)	High Fan	l/sec	416
	Indoor (Heating)	High Fan		541
Dimensions H x W x D	Indoor		mm	240 x 1000 x 700
	Outdoor			988 x 940 x 320
Net Weight	Indoor		kg	31.00
	Outdoor			63.00
Connection Pipe Diameter (Liquid/Gas)		mm	6.35 / 12.7	9.52 / 15.88
Pipe Length (Max (Precharged))		m	75 (30)	75 (30)
Max Height Difference		m	30	30
Operation Range	Outdoor (Min - Max)	Cooling	°CDB	-10 to 50
		Heating		-15 to 24
Refrigerant	Type		R32	R32
	Charge	g	1,800	2,100

¹ Total Cooling Seasonal Performance Factor

² Heating Seasonal Performance Factor

³ Measured values in manufacturer's anechoic chamber. Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

Product Specifications

High Static Single Phase R32

Set Code			SET-ARTH24KHTA	SET-ARTH30KHTA	SET-ARTH36KHTA	SET-ARTH45KHTA	SET-ARTH54KHTA	SET-ARTH60KHTA	
Model No.	Indoor unit		ARTH24KHTA	ARTH30KHTA	ARTH36KHTA	ARTH45KHTA	ARTH54KHTA	ARTH60KHTA	
	Outdoor unit		AOTH24KBTA	AOTH30KBTA	AOTH36KBTA	AOTH45KBTA	AOTH54KBTA	AOTH60KBTA	
Power Source	V / Ph / Hz		230 / 1 / 50						
Capacity	Cooling (Rated (Min - Max))	kW	7.10 (1.8 - 8.1)	8.50 (2.8 - 10.3)	10.00 (2.8 - 11.4)	12.50 (4.0 - 14.0)	14.00 (4.5 - 15.0)	15.50 (5.0 - 16.5)	
	Heating (Rated (Min - Max))	kW	8.00 (2.0 - 9.1)	10.00 (2.7 - 11.3)	11.20 (2.7 - 14.0)	14.00 (4.2 - 16.5)	15.50 (4.7 - 18.0)	18.00 (5.1 - 19.0)	
Input Power	Cooling (Rated (Max))	kW	2.14 (2.53)	2.35 (3.47)	3.08 (4.01)	3.80 (5.16)	4.64 (5.17)	4.94 (6.02)	
	Heating (Rated (Max))	kW	2.05 (2.45)	2.35 (4.12)	2.8 (4.21)	3.42 (5.22)	4.40 (5.23)	4.89 (6.74)	
EER	Cooling	kW / kW	3.32	3.62	3.25	3.29	3.02	3.14	
COP	Heating	kW / kW	3.90	4.26	4.00	4.09	3.52	3.68	
Star Rating	Cooling: Hot/Average/Cold		3 / 3 / 3	3 / 2.5 / 3	3 / 2.5 / 3	3 / 2.5 / 3	2.5 / 2.5 / 2.5	2.5 / 2.5 / 2.5	
	Heating: Hot/Average/Cold		3 / 2.5 / 1.5	3 / 2.5 / 2	3 / 2.5 / 1.5	3 / 2.5 / 2	3 / 2 / 1.5	2.5 / 2 / 1.5	
TCSPF ¹	Residential (Hot/Average/Cold)	kW	4.912 / 4.611 / 4.875	4.695 / 4.469 / 4.637	4.642 / 4.426 / 4.675	4.612 / 4.403 / 4.635	4.339 / 4.147 / 4.39	4.378 / 4.193 / 4.416	
HSPF ²	Residential (Hot/Average/Cold)	kW	4.825 / 4.11 / 3.444	4.61 / 4.211 / 3.654	4.72 / 4.073 / 3.429	4.766 / 4.208 / 3.574	4.691 / 3.937 / 3.306	4.487 / 3.885 / 3.31	
Running current	Cooling/Heating		amps	9.4 / 9.0	10.4 / 10.4	13.6 / 12.3	16.7 / 15.0	20.4 / 19.3	21.7 / 21.4
Moisture Removal		l/hr	0.5	0.1	1.4	0.9	1.6	2.8	
Sound Pressure Level ³	Indoor (Cooling)	High/Quiet	dBA	34 / 27	41 / 36	41 / 36	43 / 35	45 / 36	45 / 36
	Indoor (Heating)	High/Quiet		34 / 27	41 / 36	41 / 36	43 / 35	45 / 36	45 / 36
	Outdoor (Cooling/Heating)	High		48 / 50	51 / 53	53 / 53	55 / 57	55 / 57	53 / 55
Sound Power Level	Outdoor	High		68	69	70	71	72	71
Static Pressure Range	Min - Max		PA	60 - 210	60 - 210	60 - 210	60 - 260	60 - 260	60 - 260
Air Circulation	Indoor (Cooling)	High Fan	l/sec	500	695	695	903	986	986
	Indoor (Heating)	High Fan		500	695	695	903	986	986
Dimensions H x W x D	Indoor		mm	400 x 1050 x 500	400 x 1050 x 500	400 x 1050 x 500	425 x 1250 x 490	425 x 1250 x 490	425 x 1250 x 490
	Outdoor			716 x 820 x 315	788 x 940 x 320	788 x 940 x 320	998 x 940 x 320	998 x 940 x 320	1418 x 970 x 370
Net Weight	Indoor		kg	38.00	39.00	39.00	53.00	53.00	53.00
	Outdoor			36.00	52.00	52.00	67.00	67.00	95.00
Connection Pipe Diameter (Liquid/Gas)		mm	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
Pipe Length (Max (Precharged))		m	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	
Max Height Difference		m	25	30	30	30	30	30	
Operation Range	Outdoor (Min - Max)	Cooling	°CDB	-10 to 50	-10 to 50	-10 to 50	-10 to 50	-10 to 50	-10 to 50
		Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type		R32	R32	R32	R32	R32	R32	
	Charge	g	1,250	1,900	1,900	2,700	2,700	2,550	

¹ Total Cooling Seasonal Performance Factor

² Heating Seasonal Performance Factor

³ Measured values in manufacturer's anechoic chamber. Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

High Static Single Phase R32 (HP)

Set Code			SET-ARTH30KHTA-HP	SET-ARTH36KHTA-HP	SET-ARTH45KHTA-HP	SET-ARTH54KHTA-HP	SET-ARTH60KHTB	
Model No.	Indoor unit		ARTH30KHTA-HP	ARTH36KHTA-HP	ARTH45KHTA-HP	ARTH54KHTA-HP	ARTH60KHTB	
	Outdoor unit		AOTH30KCTA	AOTH36KCTA	AOTH45KCTA	AOTH54KCTA	AOTH60KCTA	
Power Source	V / Ph / Hz		230 / 1 / 50					
Capacity	Cooling (Rated (Min - Max))	kW	8.50 (4.1 - 11.0)	10.00 (5.0 - 13.0)	12.50 (5.6 - 14.5)	14.00 (6.3 - 16.5)	16.00 (7.4 - 17.5)	
	Heating (Rated (Min - Max))	kW	10.00 (4.2 - 12.0)	12.50 (5.2 - 15.0)	15.00 (5.2 - 17.0)	16.50 (5.8 - 18.5)	18.00 (7.4 - 20.5)	
Input Power	Cooling (Rated (Max))	kW	2.18 (3.36)	2.6 (5.01)	3.43 (4.39)	3.91 (5.35)	4.82 (5.31)	
	Heating (Rated (Max))	kW	2.2 (3.12)	2.94 (4.65)	3.49 (4.46)	4.00 (4.49)	4.63 (5.19)	
EER	Cooling	kW / kW	3.90	3.85	3.61	3.58	3.32	
COP	Heating	kW / kW	4.55	4.25	4.30	4.13	3.89	
Star Rating	Cooling: Hot/Average/Cold		3 / 3 / 3	3 / 3 / 3	3 / 3 / 3	3 / 2.5 / 3	3 / 2.5 / 3	
	Heating: Hot/Average/Cold		3 / 3 / 2	3 / 2.5 / 2	3 / 2.5 / 2	2.5 / 2.5 / 2	3 / 2.5 / 1.5	
TCSPF ¹	Residential (Hot/Average/Cold)	kW	4.833 / 4.593 / 4.727	4.964 / 4.727 / 4.9	4.785 / 4.573 / 4.76	4.666 / 4.464 / 4.642	4.533 / 4.342 / 4.555	
HSPF ²	Residential (Hot/Average/Cold)	kW	4.856 / 4.509 / 3.994	4.912 / 4.377 / 3.733	4.702 / 4.305 / 3.753	4.4 / 4.028 / 3.502	4.521 / 4.001 / 3.428	
Running current	Cooling/Heating		amps	9.6 / 9.7	11.4 / 12.9	15.1 / 15.3	17.2 / 17.5	21.1 / 20.3
Moisture Removal		l/hr	0.1	1.4	0.9	1.6	3.4	
Sound Pressure Level ³	Indoor (Cooling)	High/Quiet	dBA	41 / 36	41 / 36	43 / 35	45 / 36	44 / 39
	Indoor (Heating)	High/Quiet		41 / 36	41 / 36	43 / 35	45 / 36	44 / 39
	Outdoor (Cooling/Heating)	High		51 / 53	53 / 53	53 / 53	53 / 55	53 / 55
Sound Power Level	Outdoor	High		69	70	70	71	71
Static Pressure Range	Min - Max		PA	60 - 210	60 - 210	60 - 260	60 - 260	60 - 250
Air Circulation	Indoor (Cooling)	High Fan	l/sec	695	695	903	986	1139
	Indoor (Heating)	High Fan		695	695	903	986	1139
Dimensions H x W x D	Indoor		mm	400 x 1050 x 500	400 x 1050 x 500	425 x 1250 x 490	425 x 1250 x 490	360 x 1400 x 850
	Outdoor			998 x 940 x 320	998 x 940 x 320	1418 x 970 x 370	1418 x 970 x 370	1418 x 970 x 370
Net Weight	Indoor		kg	39.00	39.00	53.00	53.00	69.00
	Outdoor			64.00	67.00	95.00	101.00	101.00
Connection Pipe Diameter (Liquid/Gas)		mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
Pipe Length (Max (Precharged))		m	75 (30)	75 (30)	75 (30)	75 (30)	75 (30)	
Max Height Difference		m	30	30	30	30	30	
Operation Range	Outdoor (Min - Max)	Cooling	°CDB	-10 to 50	-10 to 50	-10 to 50	-10 to 50	-10 to 50
		Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type		R32	R32	R32	R32	R32	
	Charge	g	2,100	2,500	3,400	3,800	3,800	

¹ Total Cooling Seasonal Performance Factor

² Heating Seasonal Performance Factor

³ Measured values in manufacturer's anechoic chamber. Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

Product Specifications

High Static Three Phase R32

Set Code			SET-ARTH36KHTA-3PH	SET-ARTH45KHTA-3PH	SET-ARTH54KHTA-3PH	SET-ARTH60KHTA-3PH
Model No.	Indoor unit		ARTH36KHTA-3PH	ARTH45KHTA-3PH	ARTH54KHTA-3PH	ARTH60KHTA-3PH
	Outdoor unit		AOTH36KRTA	AOTH45KRTA	AOTH54KRTA	AOTH60KRTA
Power Source	V / Ph / Hz		400 / 3 / 50			
Capacity	Cooling (Rated (Min - Max))	kW	10.00 (2.8 - 11.4)	12.50 (4.0 - 14.0)	14.00 (4.5 - 15.0)	15.50 (5.0 - 16.5)
	Heating (Rated (Min - Max))	kW	11.20 (2.7 - 14.0)	14.00 (4.2 - 16.5)	15.50 (4.7 - 18.0)	18.00 (5.1 - 19.0)
Input Power	Cooling (Rated (Max))	kW	3.08 (4.01)	3.80 (5.16)	4.64 (5.17)	4.94 (6.02)
	Heating (Rated (Max))	kW	2.8 (4.21)	3.42 (5.22)	4.40 (5.23)	4.89 (6.74)
EER	Cooling	kW / kW	3.25	3.29	3.02	3.14
COP	Heating	kW / kW	4.00	4.09	3.52	3.68
Star Rating	Cooling: Hot/Average/Cold		3 / 2.5 / 3	3 / 2.5 / 3	2.5 / 2.5 / 2.5	2.5 / 2.5 / 2.5
	Heating: Hot/Average/Cold		3 / 2.5 / 1.5	3 / 2.5 / 2	3 / 2 / 1.5	2.5 / 2 / 1.5
TCSPF ¹	Residential (Hot/Average/Cold)	kW	4.642 / 4.426 / 4.675	4.612 / 4.403 / 4.635	4.339 / 4.147 / 4.39	4.378 / 4.193 / 4.416
HSPF ²	Residential (Hot/Average/Cold)	kW	4.72 / 4.073 / 3.429	4.766 / 4.208 / 3.574	4.691 / 3.937 / 3.306	4.487 / 3.885 / 3.31
Running current	Cooling/Heating		amps	5.2 / 4.7	6.4 / 5.7	7.7 / 7.0
Moisture Removal			l/hr	1.4	0.9	1.6
Sound Pressure Level ³	Indoor (Cooling)	High/Quiet	dBA	41 / 36	43 / 35	45 / 36
	Indoor (Heating)	High/Quiet		41 / 36	43 / 35	45 / 36
	Outdoor (Cooling/Heating)	High		53 / 53	55 / 57	55 / 57
Sound Power Level	Outdoor	High		70	71	72
Static Pressure Range	Min - Max		PA	60 - 210	60 - 260	60 - 260
Air Circulation	Indoor (Cooling)	High Fan	l/sec	695	903	986
	Indoor (Heating)	High Fan		695	903	986
Dimensions H x W x D	Indoor		mm	400 x 1050 x 500	425 x 1250 x 490	425 x 1250 x 490
	Outdoor			788 x 940 x 320	998 x 940 x 320	998 x 940 x 320
Net Weight	Indoor		kg	39.00	53.00	53.00
	Outdoor			53.00	67.00	67.00
Connection Pipe Diameter (Liquid/Gas)			mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Pipe Length (Max (Precharged))			m	50 (30)	50 (30)	50 (30)
Max Height Difference			m	30	30	30
Operation Range	Outdoor (Min - Max)	Cooling	°CDB	-10 to 50	-10 to 50	-10 to 50
		Heating		-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type			R32	R32	R32
	Charge	g		1,500	2,180	2,180

¹ Total Cooling Seasonal Performance Factor

² Heating Seasonal Performance Factor

³ Measured values in manufacturer's anechoic chamber. Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

Large Capacity High Static Single Phase & Three Phase R32

Set Code			SET-ARTH65KHTA	SET-ARTH65KHTA-3PH	SET-ARTH72KHTA-3PH	SET-ARTH90KHTA-3PH
Model No.	Indoor unit		ARTH65KHTA	ARTH65KHTA	ARTH72KHTA	ARTH90KHTA
	Outdoor unit		AOTH65KBTA	AOTH65KRTA	AOTH72KRTA	AOTH90KRTA
Power Source	V / Ph / Hz		220-240 / 1 / 50	380-415 / 3 / 50		
Capacity	Cooling (Rated (Min - Max))	kW	18.0 (5.5 - 20.0)	18.0 (5.5 - 20.0)	20.0 (6.0 - 22.4)	22.4 (6.5 - 26.0)
	Heating (Rated (Min - Max))	kW	20.0 (5.5 - 22.4)	20.0 (5.5 - 22.4)	22.4 (6.0 - 25.0)	25.0 (6.5 - 30.0)
Input Power	Cooling (Rated (Max))	kW	5.61	5.61	6.16	7.42
	Heating (Rated (Max))	kW	5.24	5.24	5.82	6.70
EER	Cooling	kW / kW	3.21	3.21	3.25	3.02
COP	Heating	kW / kW	3.82	3.82	3.85	3.73
Star Rating	Cooling: Hot/Average/Cold		3.0 / 2.5 / 3.0	3.0 / 2.5 / 3.0	2.5 / 2.5 / 2.5	2.0 / 2.0 / 2.0
	Heating: Hot/Average/Cold		3.0 / 2.5 / 1.5	3.0 / 2.5 / 1.5	3.0 / 2.5 / 1.5	2.5 / 2.0 / 1.5
TCSPF ¹	Residential (Hot/Average/Cold)	kW	4.532 / 4.343 / 4.585	4.532 / 4.343 / 4.585	4.396 / 4.214 / 4.415	3.964 / 3.804 / 3.967
HSPF ²	Residential (Hot/Average/Cold)	kW	4.503 / 4.001 / 3.446	4.503 / 4.001 / 3.446	4.651 / 4.047 / 3.402	4.170 / 3.615 / 3.058
Running Current	Cooling/Heating	amps	24.60 / 23.00	8.60 / 8.10	9.90 / 9.50	11.70 / 10.60
Outdoor Breaker		amps	32	16	20	20
Moisture Removal		l/hr	4.00	4.00	5.30	4.60
Sound Pressure Level ³	Indoor (Cooling)	High/Quiet	dBA	44 / 35	44 / 35	46 / 39
	Indoor (Heating)	High/Quiet		44 / 35	44 / 35	46 / 39
	Outdoor (Cooling/Heating)	High		57 / 58	57 / 58	59 / 61
Sound Power Level	Outdoor	High		74	74	75
Static Pressure Range	Min - Max		PA	60 to 200	60 to 200	60 to 200
Air Circulation	Indoor (Cooling)	High Fan	l/sec	1,139	1,139	1,194
	Indoor (Heating)	High Fan		1,139	1,139	1,195
Dimensions H x W x D	Indoor		mm	360 × 1,400 × 850	360 × 1,400 × 850	360 × 1,400 × 850
	Outdoor			1,418 × 970 × 370	1,418 × 970 × 370	1,418 × 970 × 370
Net Weight	Indoor		kg	69	69	69
	Outdoor			101	102	107
Connection Pipe Diameter (Liquid/Gas)		mm	9.52 / 15.88	9.52 / 15.88	12.7 / 19.05	12.7 / 19.05
Pipe Length (Max (Precharged))		m	75 (30)	75 (30)	75 (30)	75 (30)
Max Height Difference		m	30	30	30	30
Operation Range	Outdoor (Min - Max)	Cooling	°CDB	-15 to 50	-15 to 50	-15 to 50
		Heating		-20 to 24	-20 to 24	-20 to 24
Refrigerant	Type		R32	R32	R32	R32
	Charge	g	3,800	3,800	4,500	4,500

¹ Total Cooling Seasonal Performance Factor

² Heating Seasonal Performance Factor

³ Measured values in manufacturer's anechoic chamber. Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

AUSTRALIA'S FAVOURITE AIR®

| FUJITSU

FUJITSU GENERAL AUSTRALIA
A SUBSIDIARY OF FUJITSU GENERAL LIMITED

fujitsugeneral.com.au
1300 882 201
contact@fujitsugeneral.com.au

Fujitsu General accepts no liability for incorrect data.
Please ensure you have confirmed installation
requirements and pipe sizes prior to install.

FGADUCTED09/25

AIRSTAGE